


#### www.vmzinc.in










MUMBAI: Corporate Office:
116, F Wing,1st Floor, Kanakia Zillion,
LBS Marg, Kurla (West),
Mumbai - 400070
Tel No.: 022 6225 3400
Mob No.: +91 98190 42651 / +91 91523 62771
E-mail: vmzinc.india@vmzinc.com

DELHI: Office:
B1/H3, Mohan Co-Operative,
Mathura Road, Industrial Area, Block B,
New Delhi - 110044
Mob No.:+91 91523 62771
E-mail: vmzinc.india@vmzinc.com

vmzinc.india@vmbuildingsolutions.com

VMZINC India Private Limited - Mumbai I Delhi I Bangalore I Cochin I Hyderabad

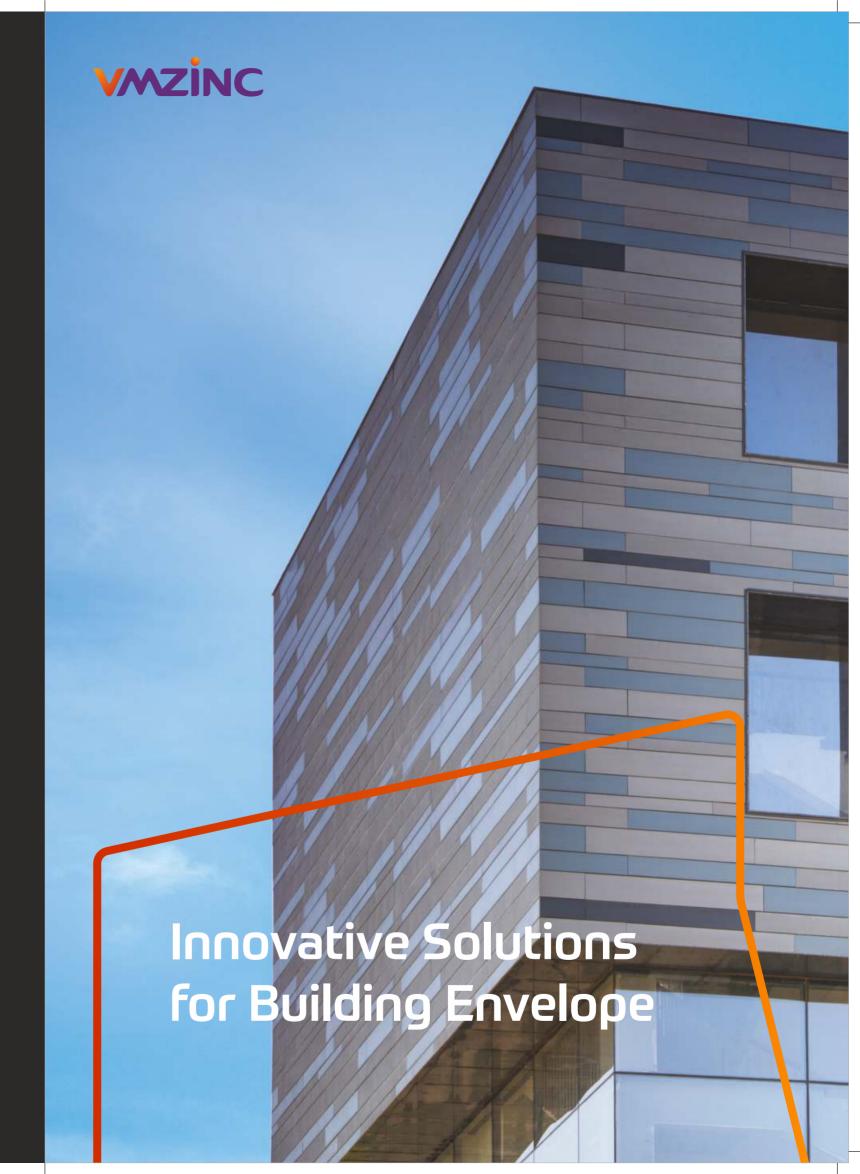


## vmzinc Make it yours

Customisation is not just for sports brands, it is a growing trend in all sectors and the building industry is no exception. Clients and design teams are looking for original, made-to-order solutions to put their hallmark on projects. VMZINC provides responses to these new requirements and today offers colours on request, folds and made-to-order perforations that extend the use of zinc.

#### VMZINC PERFORATED ZINC

VMZINC offers a wide range of standard or made-to-order perforations according to the aesthetics and degree of transparency sought: rounded, square, rectangular or trapezoidal forms; uniform or arbitrary layout and photographic reproduction using pixellation of motifs. These perforations, combined with VMZINC constructive systems, give rhythm to facades by creating a contrast between shadows and light. The perforated cladding becomes a sun-shield and contributes to improving the thermal performance of buildings. Thanks to its self-protective properties, perforated zinc acquires a natural patina, eliminating the need for post-lacquering of the cut edges, which is often necessary with other metals. The intrinsic qualities of zinc make it an ideal material for perforated cladding systems. The elegance and lifespan of the project are ensured over the long term.

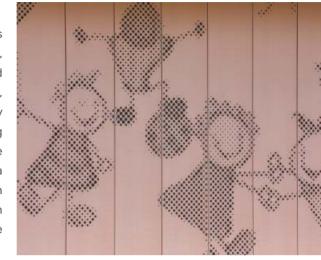

#### **COLOURS ON REQUEST**

A pioneer in surface aspect treatment since 1837, VMZINC makes its know-how available to contemporary architecture and is providing its PIGMENTO and lacquered range of colours on request. This ground-breaking offer is new to the market, makes it possible to have a multitude of shades and is an invitation to creativity.

Available for all VMZINC facade and roofing systems, these colours are created jointly by design teams and VMZINC teams. In the space of several weeks, prototypes in the desired colours are available for validation.

For each individual customisation, every request is specifically examined by the VMZINC teams to provide a comprehensive solution to suit each specific situation.

#### SOLUTIONS WITH SPECIFIC FOLDS

VMZINC's industrial skills enable the brand to develop cladding systems on request in the form of customised profiles, installed on a metal framework. Assembled using invisible fixing, various ranges and depths can feature on a single profile. These profiles provide rhythm and structure, and are prototyped upstream. All profiles are then packaged and delivered per type of fold in order to ensure quick and easy installation of the facade.



### **VMZINC** Environmentally Friendly

Zinc is a natural element of our environment. It takes very little energy to manufacture compared to other metals used in equivalent building envelope applications. Rolled zinc is unique in that it reacts with the main components of the atmosphere by creating a self-protective coating. Thanks to the latter, zinc can easily last hundred years. Rolled zinc is also 100% recyclable and 95% of it is effectively recovered and re-used in different areas of application.

With VMZINC® solutions you can dare to be creative and make a mark without marking the environment.

- > 100% natural
- > Low energy consumption
- > Lasts up to 100 years
- > 100% recyclable



### **Environmental Product Declarations**











**IBU** Certifikat

### **Environmental Assessments**

























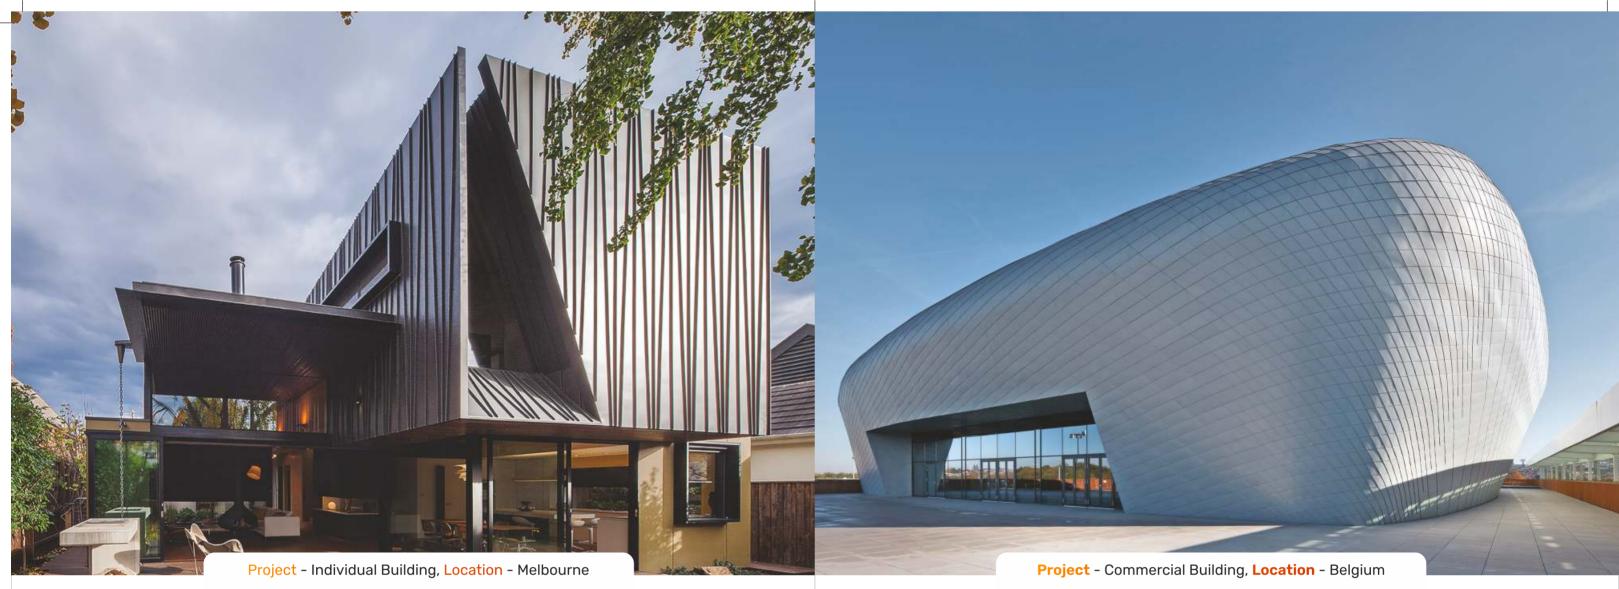





### vmzinc Facade

From roof to facade.

- > Can be installed horizontally or vertically
- > Provides strong, uninterrupted lines
- > Maximum waterproofing

Area of Application	Straight, curved and complex
Thickness	0.8 mm
Standard Coil Width	500 mm
Standard Center to Center / Height of Seam	416 mm / 32 mm 430 mm / 25 mm
Maximum length of panel	Horizontal layout: 6 meters Vertical layout: 4 meters
Minimum Radius of Curvature	300 mm
Support System	Rigid & continuous in all parts
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, PIGMENTO & AZENGAR
Color on Demand	Minimum Quantity 500 Sqmt






# vmzinc Facade Flatlock Panel

Textured facade.


- > Can be installed horizontally or vertically
- > Provides a heightened, textural aesthetic
- > A traditional approach to wall cladding

Area of Application	Straight, curved and complex
Thickness	0.7 mm & 0.8 mm
Standard Coil Width	500 mm
Standard Center to Center / Height of Seam	390 mm for non recessed joint 375 mm for recessed joint
Maximum length of panel	3 meters
Support System	Rigid & continuous in all parts
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, PIGMENTO & AZENGAR
Color on Demand	Minimum Quantity 500 Sqmt

Innovative Solution > Standing Seam Innovative Solution > Flatlock Panel

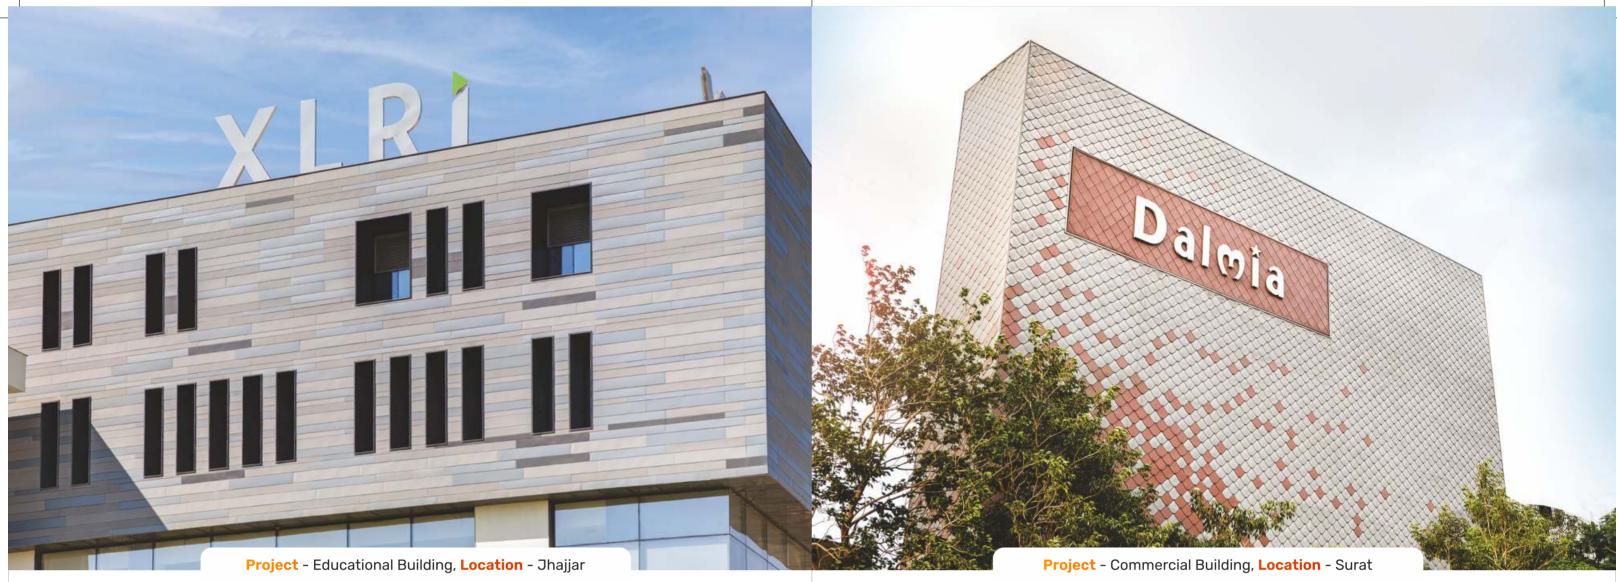



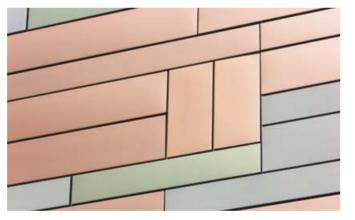

### vmzinc Facade Interlocking Panel

An elegant facade.

06

- > Can be installed horizontally or vertically
- > Hidden fasteners beyond a clean, flat panel
- > A reveal between panels enhances shadow lines

Area of Application	Straight
Thickness	0.8 mm & 1 mm
Standard Center to Center	150 mm, 220 mm, 300 mm
Maximum length of panel	3 meters
Support System	Framework of galvanized steel or aluminium rails fixed every 600 mm on the main structure
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, PIGMENTO & AZENGAR
Color on Demand	Minimum Quantity 500 Sqmt





## vmzinc Facade

ADEKA


A traditional facade.

- > Installed in a shingled aesthetic on the facade
- > Excellent waterproofing
- > Easy to install

Area of Application	Straight and curved
Thickness	0.65 mm
Useful Dimensions	400 mm x 400 mm
No. elements/m2	8.8
Packaging	24 Adeka / box
Support System	Rigid & continuous in all parts
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, PIGMENTO
Color on Demand	Minimum Quantity 500 Sqmt

Innovative Solution > Interlocking Panel 07



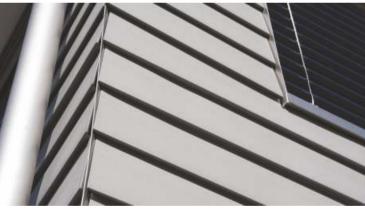



# vmzinc Facade Overlapping Panel

A tapered facade.

80

- > Installed horizontally
- > Gives a louver effect
- > Externally sloping panels

Area of Application	Straight
Thickness	0.8 mm
Standard Center to Center	175 mm
Maximum length of panel	3 meters
Support System	Framework of galvanized steel or aluminium rails fixed every 600 mm on main structure
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, PIGMENTO & AZENGAR
Color on Demand	Minimum Quantity 500 Sqmt





## vmzinc Facade

----

A structured facade.

- > Refined aesthetics of very flat zinc elements
- > Meticulously finished accessories, invisible fasteners
- > Full range of components: framework, fasteners, finishing accessories

Area of Application	Straight and curved
Thickness	4 mm
Width	990 mm Standard and 1240 mm on demand*
Maximum Length of Panel	5 meters
Desnity	12kg / Sq.m
Support System	Framework of galvanized steel or aluminium rails fixed every 600 mm on main structure
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, PIGMENTO & AZENGAR

Innovative Solution > Overlapping Panel







## vmzinc Facade

A rhythmic facade.

10

- > Can be installed horizontally or vertically
- > A soft, undulating corrugation with through fasteners
- > The "look" of the material can be contemporary or recall the rural vernacular

Area of Application	Straight an	d curved	
Thickness	0.8 mm & 1	mm	
Profile Designation	18/76	25/115	43/180
Wave Depth	18 mm	25 mm	43 mm
Peak to Peak Distance	76 mm	115 mm	180 mm
Radius for Natural Curving / Horizontal Curving	15 meters	30 meters	40 meters
Support System	Framework of galvanized steel or aluminium rails fixed every 600 mm on main structure		
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, PIGMENTO & AZENGAR		
Color on Demand	Minimum Q	uantity 500 S	Sqmt





## VMZINC Facade


An elegant facade.


- > Wider & Bigger Panels
- > Rainscreen system
- > Relief Panels

Area of Application	Straight
Thickness	1 mm & 1.5 mm
Width	450 mm, 600 mm & 900 mm
Maximum Length of Panel	2.4 meters
Support System	Framework of galvanized steel or aluminium rails fixed every 600 mm on main structure
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, PIGMENTO & AZENGAR
Color on Demand	Minimum Quantity 500 Sqmt

Innovative Solution > Sine Wave Panel



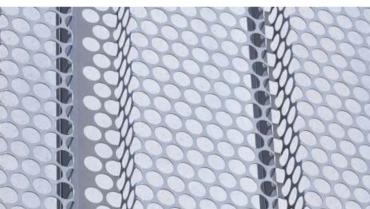

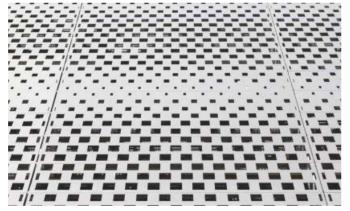

### vmzinc Facade


#### Perforation

Aesthetically Designed Perforation.

- > For Sunscreen to reduce heat gain
- > Air Ventilation purpose
- > Customized perforation

Area of Application	Straight, curved and complex
Thickness	0.8 mm, 1 mm & 1.5 mm
Size	Customised
Width	Maximum 1000 mm
Maximum Length of Panel	3 meters
Support System	Framework of galvanized steel or aluminium rails fixed every 600 mm on main structure
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, AZENGAR & natural zinc



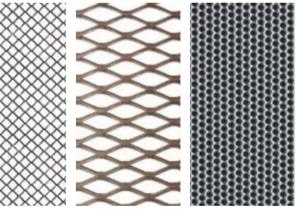

### vmzinc Facade


#### Expanded Mest

Light, economic and flexible.

- > For Sunscreen to reduce heat gain
- > Air Ventilation purpose
- > Customized Mesh

Area of Application	Straight, curved and complex
Thickness	1 mm & 1.5 mm
Size	Customised
Width	Maximum 1000 mm
Support System	Framework of galvanized steel or aluminium rails fixed every 600 mm on main structure
Surface Finishes	QUARTZ-ZINC & natural zinc

Innovative Solution > Perforation Innovative Solution > Expanded Mesh

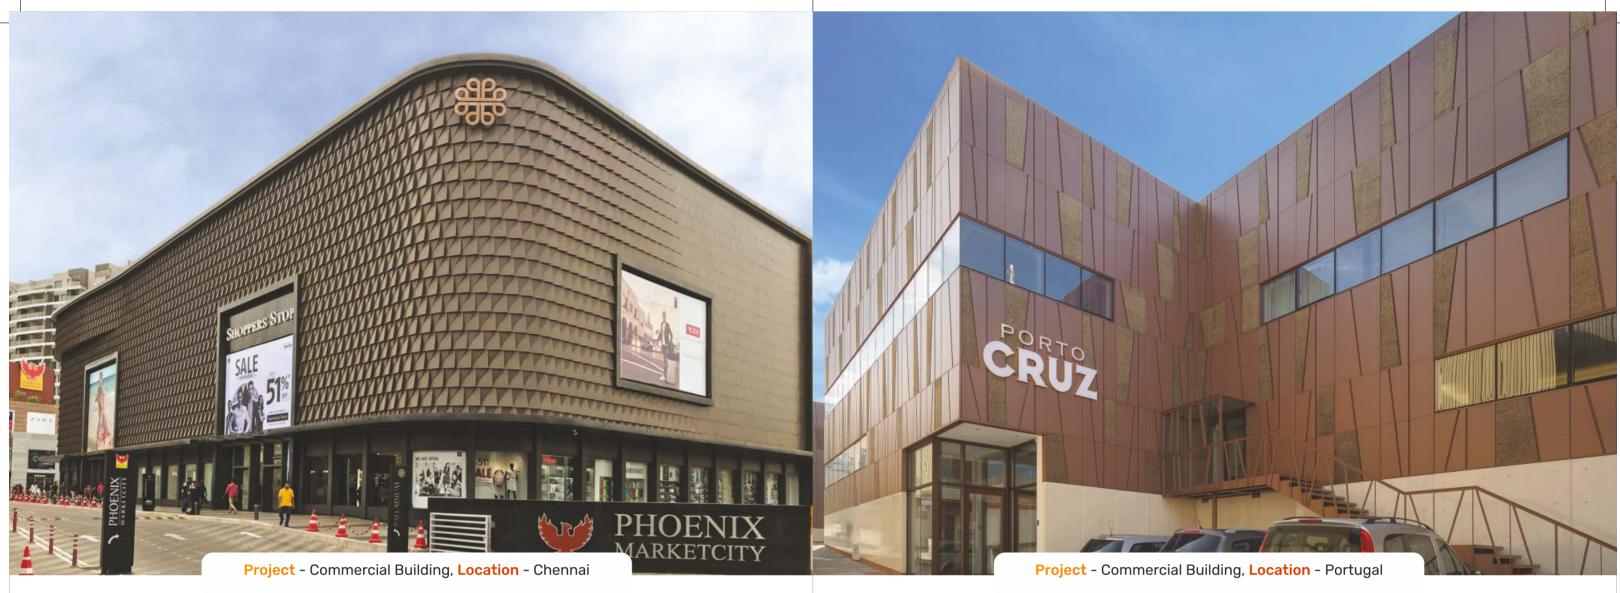







#### Parametri

- > Capability to produce flexible designs
- > Allows deeper comprehension of design objectives
- > Aids designer in their decisions to find solutions

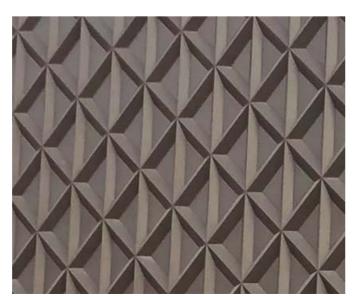



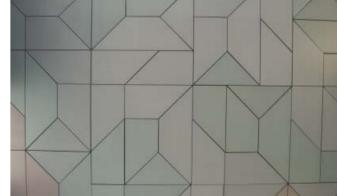

### vwzinc Facade

#### Lustomised

- > Customized design requirements
- > Large range of bespoke forms of facades
- > Broad knowledge and experience



Innovative Solution > Parametric







### vwzinc Roofing Standing Seam

Tradition lives on...

- > Can be installed vertically or diagonally
- > Panel length up to 15+ meters
- > Maximum waterproofing

Area of Application	Straight, curved and complex
Minimum Pitches°	3° (5%)
Thickness	0.7 mm
Standard Coil Width	500 mm
Standard Center to Center / Height of Seam	416 mm / 32 mm 430 mm / 25 mm
Maximum Length of Panel	15 meters
Minimum Radius Curvature	300 mm
Support System	Rigid & continuous in all parts. Meet loading resistance requirement with a pull out strength of 50 daN for each fixing clip.
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, AZENGAR, PIGMENTO
Color on Demand	Minimum Quantity 500 Sqmt





### vmzinc Roofing Flatlock Panel

Textural roof...

- > Fits to any shapes
- > Customised tiles (Square, Diamond, Hexagonal etc)
- > Uncomparable asthetical effect

Area of Application	Straight, Curved and Complex
Thickness	0.7 mm
Standard Center to Center	390 mm
Minimum Pitches	60°
Support System	Rigid & continuous in all parts. Meet loading resistance requirement with a pull out strength of 50 daN for each fixing clip.
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, AZENGAR, PIGMENTO
Color on Demand	Minimum Quantity 500 Sqmt







## vmzinc Roofing

### 15 degrees...

- > Small and easily installed shingles
- > Provide a textured aesthetic
- > Excellent waterproofing

Area of Application	Straight and curved
Minimum Pitches°	15° (25%)
Thickness	0.65 mm
Useful Dimensions	400 mm x 400 mm
No. elements/m²	8.8
Packaging	24 Adeka / box
Support System	Rigid & continuous in all parts
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, AZENGAR, PIGMENTO
Color on Demand	Minimum Quantity 500 Sqmt





## vwzinc Interior

- > The inimitable elegance of preweathered zinc with a velvet-like aspect, for a uniquely refined interior
- > Modular system with different formats for greater creativity
- > Reinforced cassettes that are lightweight and resilient
- > Simple one-person installation and disassembly

Thickness	0.7 mm to 1.5 mm
Size	Customised
Width	Maximum 1000 mm
Length	Maximum 2400 mm
Surface Finishes	QUARTZ-ZINC, ANTHRA-ZINC, PIGMENTO & AZENGAR
Color on Demand	Minimum Quantity 500 Sqmt

Innovative Solution > Adeka 19

## **VMZINC** Technical Assistance

At VMZINC our commitment goes much further than the delivery of quality goods. That is why we work closely with all those involved, starting from the initial idea right down to the finished building.



VMZINC employs a team of architects, engineers and CAD technicians to help you keep one step ahead in the development of increasingly daring and sophisticated building envelops. Our team will assist clients to design their roofing or facade project and will stimulate their creativity by providing innovative solutions that respect budgetary requirements and the relevant standards.

Different services are provided on request

- > Feasibility analyses of even the most complex projects
- > Recommendations for working drawings
- > Architectural assistance for the development of innovative concepts
- > Review of shop drawings
- > Library of CAD drawings
- > Quantity estimates


For each individual customisation, every request is specifically examined by the VMZINC teams to provide a comprehensive solution to suit each specific situation.


### TAILORED SUPPORT

At each major stage of the project, the VMZINC teams provide support for reflection and development with numerous services.

They can provide upstream confirmation of feasibility regarding the desired customised solutions, taking local regulations into account. They can also provide an initial budgetary envelope to ensure rigorous design of the future building.

VMZINC can produce prototypes or mock-ups to facilitate decisions or validate principles of installation.

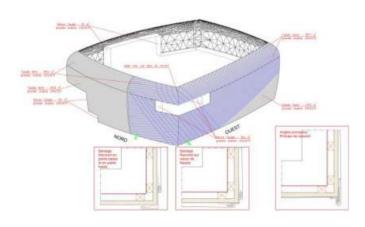

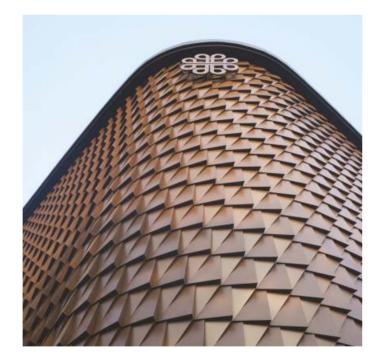

### **ADJUSTED LOGISTICS**

VMZINC's experience of managing these types of project makes it possible to provide support to installers and ensure optimum organization of on-site logistics: sequenced delivery, specific packaging, numbering of parts, assembly plan, etc.

VMZINC works in close partnership with architects, providing support to ensure their building can be customised as simply as possible.

## VMZINC Parametric Facade Projects in India






Project: Palladium Mall, Chennai | Finish: PIGMENTO Brown





Project: Esplanade Mall, Bhubaneswar | Finish: QUARTZ STRAT

Project: DMRC, Delhi | Finish: QUARTZ-ZINC & PIGMENTO red

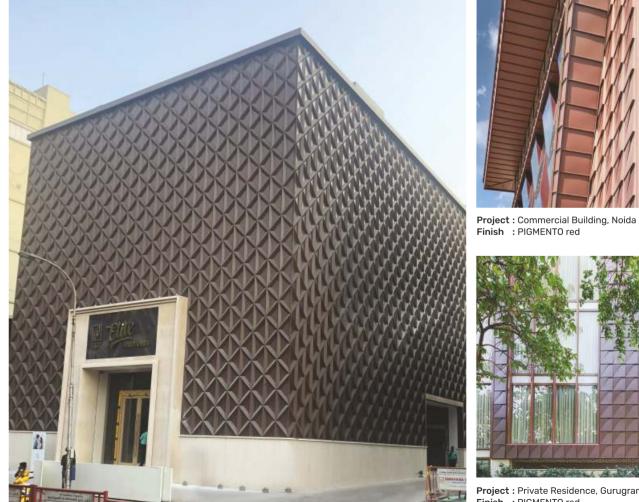



Project: Gold Showroom, Chennai | Finish: PIGMENTO brown



## **VMZİNC** Roofing Projects in India



Project : Private Residence, Noida | System : VMZINC Interlocking Panel | Finish : PIGMENTO brown & ANTHRA STRAT



Project : Private Residence, Lonawala | System : VMZINC Standing Seam | Finish : QUARTZ PLUS



Project: AIMS Hospital, Faridabad | System: VMZINC Standing Seam | Finish: QUARTZ PLUS

## **VMZİNC** Facade Projects in India



**Project :** Commercial Building, Ahmedabad System: VMZINC Customised Panel Finish : QUARTZ-ZINC



Project: Commercial Building, Noida System: VMZINC Perforation Panel Finish : QUARTZ-ZINC



**Project:** Private Residence, Gurugram System: VMZINC Interlocking Panel Finish : PIGMENTO grey



**Project :** Private Residence, Chandigarh System: VMZINC Interlocking Panel Finish : QUARTZ-ZINC



Innovative Solution > Indian Projects (Facade)

**Project :** Private Residence, New Delhi System: VMZINC Customised Panel Finish : PIGMENTO blue

22